WARNING — DISCONNECT FROM ELECTRICAL SUPPLY BEFORE SERVICING UNIT

AUTOMATIC WASHER WIRING DIAGRAM

- TIMER SWITCH
- INTEGRAL COMPONENT CONNECTION
- HARNESS WIRING
- TERMINAL CONNECTION
- 13 & 48 — SUB-INTERVAL SWITCH (OPERATION IS INTERMITTENT AND SEQUENCE IS NOT SHOWN.)
- X — TIMER SWITCH MAY BE OPEN OR CLOSED.
- DOTTED WIRES—THESE CIRCUITS AND TIMER SWITCHES MAY NOT APPEAR ON THIS MODEL.

TIMER STEPS ARE 120 SECONDS DURATION.

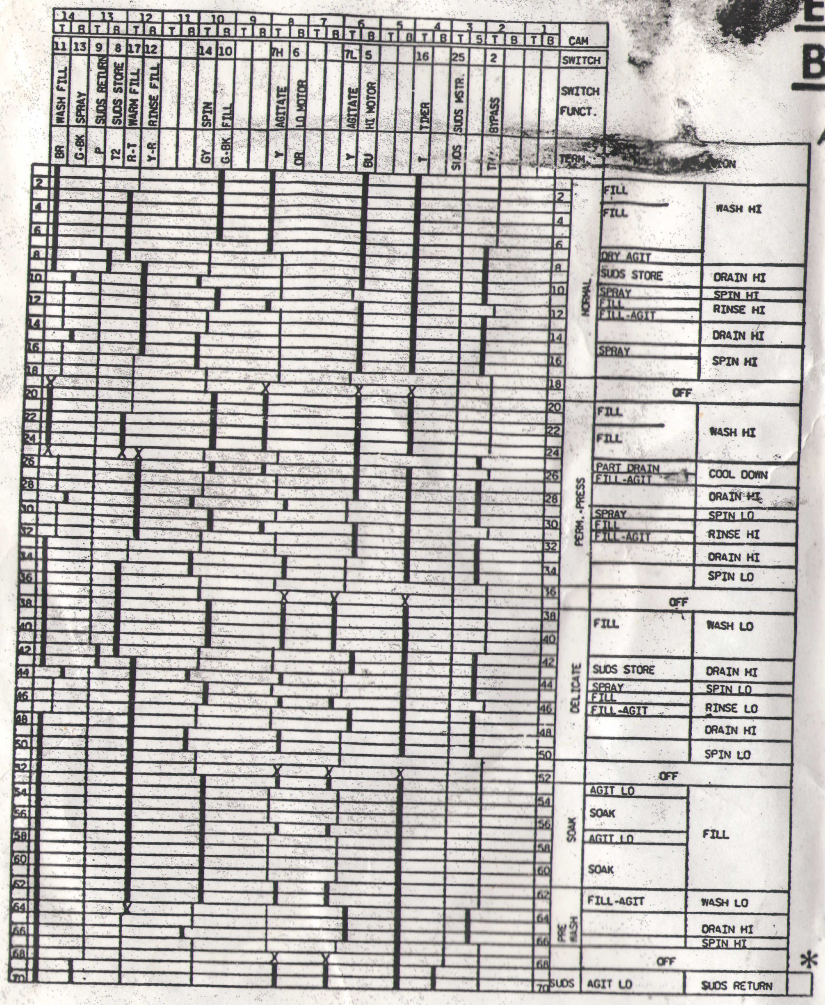

* THIS SECTION WILL BE "OFF" ON NON-SUDS MODELS.

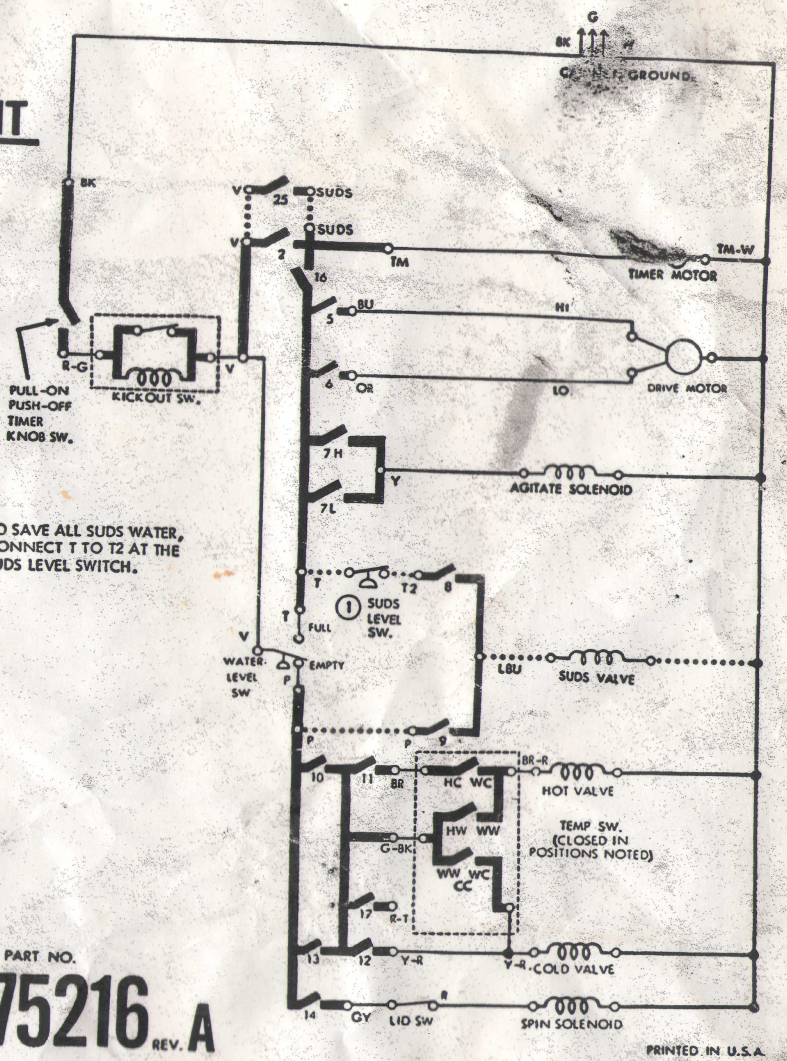

① TO SAVE ALL SUDS WATER, CONNECT T TO T2 AT THE SUDS LEVEL SWITCH.

MANUFACTURED UNDER ONE OR MORE OF THE FOLLOWING U.S. PATENTS:

Des. 196,194	3,326,134	3,696,970	3,856,036
Des. 237,004	3,328,054	3,774,418	3,863,467
2,924,959	3,429,444	3,798,931	3,880,188
2,936,604	3,500,011	3,798,932	3,884,493
2,974,513	3,576,117	3,818,729	3,891,548
3,128,615	3,636,734	3,847,812	3,921,421
3,282,427	3,681,947	3,854,308	3,939,674

Other Patents Pending

PART NO. 375216 REV. A

PRINTED IN U.S.A.